WEKAR INSTALLATION GUIDE

Here's the detailed tutorial, the time required is approximately two to three hours. If you have any questions or feedback about the car seat cover, please contact us directly.

Website: www.wekarautoshop.com Email: services@wekarautoshop.com


Model 3

Installation method of front seat cover



Scan the QR code to enter YouTube to view the

installation video.

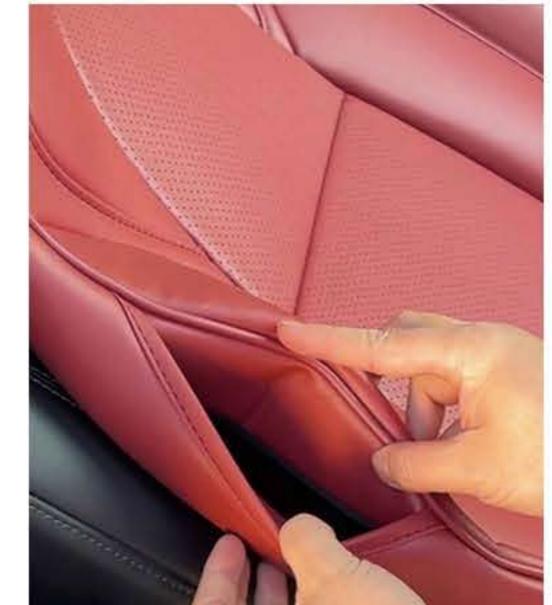

. Airbag opening can be opened.



2. Put the cover on the car seat.



3. Adjust the seat cover and make it fits smoothly and seamlessly.Wrap the seat cover in place.



4. Press the connection part by the palm of your hand.



5. Insert these three tapes into the gap.



6. Pull out the three tapes 7. Pass all three tapes to just inserted.




the front and pull out them.



8. Connect three straps with the buckles. Do not tighten it, and go to the next step first.



9. Press the position with the palm of your hand. Use your other hand to tighten the straps at the bottom.

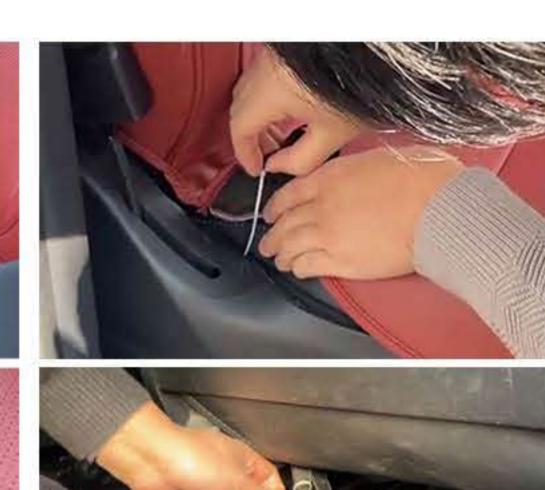

10. Insert the strip into the slit. And find the strip pull it out.(Same on the



11. Insert the strips into the slit. Please be careful not to hurt your fingers, use the wand to help you.



12. Use the mental hook to join the two strips together ((both front and back).



13. Tuck the side flap of the seat cover into the gap.



14. Use the tool to insert the side flap of the seat back cover into the gap.



15. Insert the edge of the seat sleeve into the gap.



16. Put on the cover for the front armrest.

Model 3

Installation method of rear seat cover



1. Pull the switch on the bottom of the seat. Remove socket. (Both left and right the rear seat. (Both left and right sides have one switch)



2. Disconnect the wire sides have one)



3. Pull up the headrest, insert a screwdriver into the small hole, and press the button next to it to remove the headrest.



two parts. Unzip the seat the bottom. Go through cover and cover it on the the top of the metal bar. seat. Adjust the seat cover and take out the seatbelt.




4. Split the seat back into 5. Pass the Velcro through 6. Pull the two seat covers



to the most suitable position.



7. Pull out the Velcro, tear all the anti-stick cloth in the Velcro, and stick them to the back neatly.

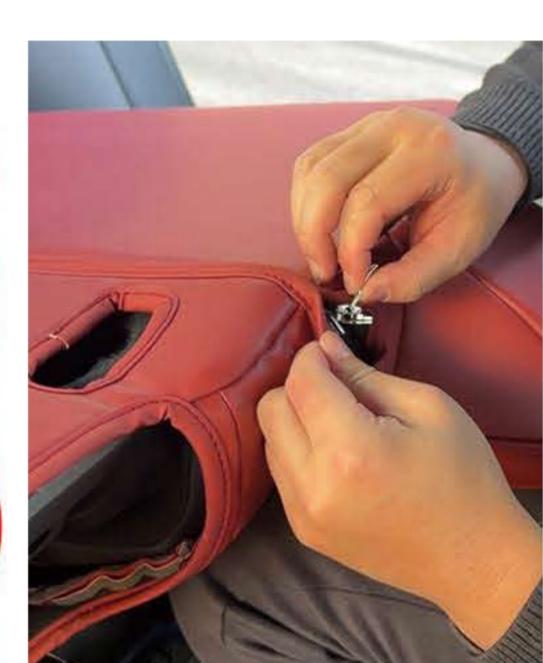

8. After the seat cover is installed in place, zip it up. anti-stick cloth on the



9. Tear off the remaining cover and stick them to the back neatly.



10. Put down the armrest. Insert the side piece into the gap, taking care not to hurt your fingers.



11. Repeat the steps just now and install another seat back cover. Please be patient and careful during the installation process.



12. Put the cover on the armrest box.



13. Insert this part from

here.



up and down, and pull out and stick it to the back. this part.




14. Swing the armrest box 15. Tear the anti-stick cloth,



16. As before, the Velcro goes through the gap, tear the anti-stick cloth and sticks it to the back.




17. Put on the headrest cover is installed in place, back to the original place. affix the Velcro.

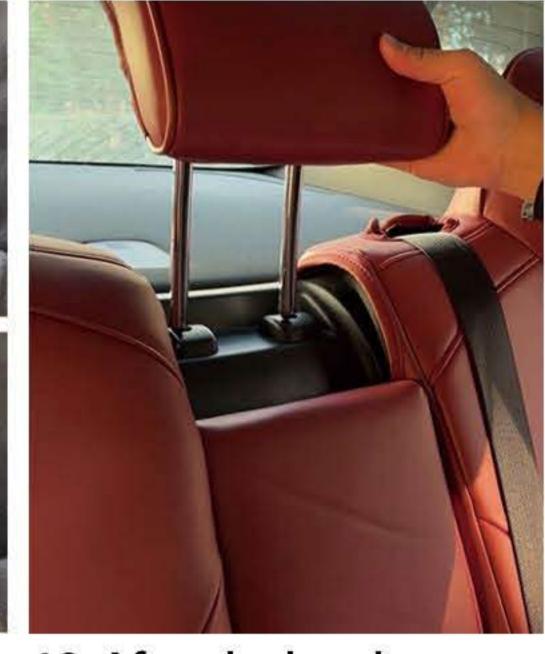

18. After the headrest cover. After the headrest cover is installed, press it



The disassembly process of the door pad can be challenging. You can choose to install it selectively or seek professional assistance for optimal installation.

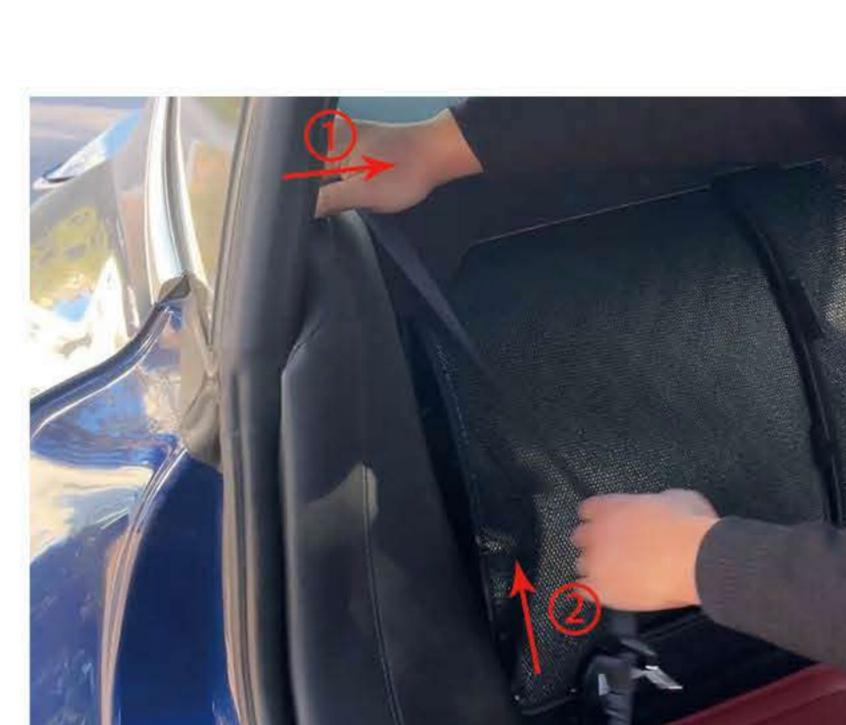


19. Removing the piece requires a bit of skill. Start by pushing it towards the inside of the car, then pull it towards the front of the car. Finally, lift it up from the bottom to successfully remove it.




20. Make sure the edge appropriate position.



21. Use the chucks to position is adjusted to the wrap the straps together.

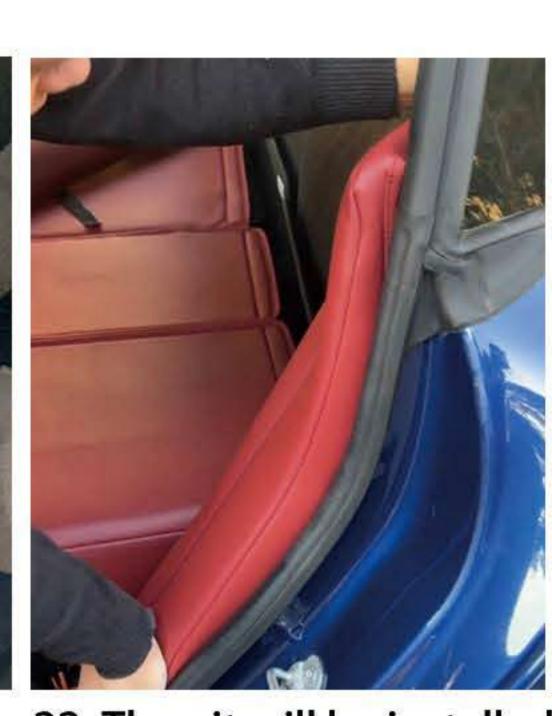


22. Then it will be installed against the snap back to the original position.

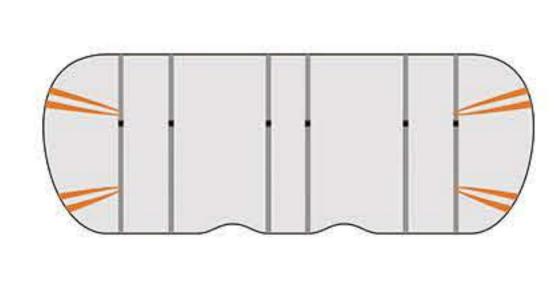

23. Installation of rear seat cushion cover, connect the bottom straps to each other.




24. Wrap all the edges.

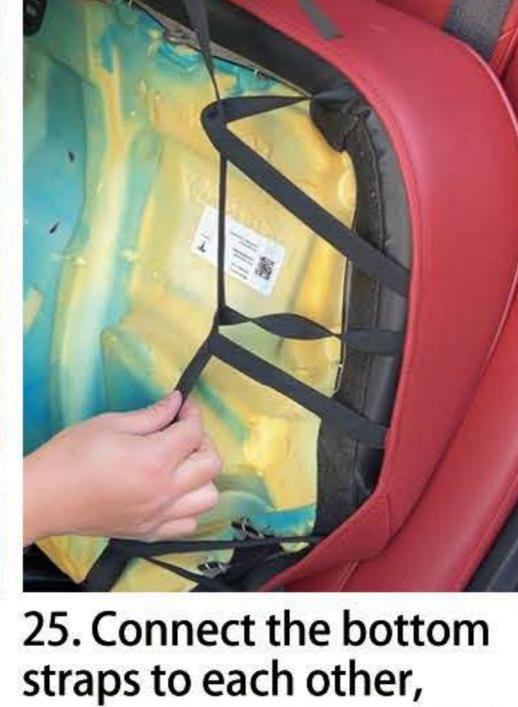

connect the side elastic belt by attach hooks or across through the side tapes.



socket.

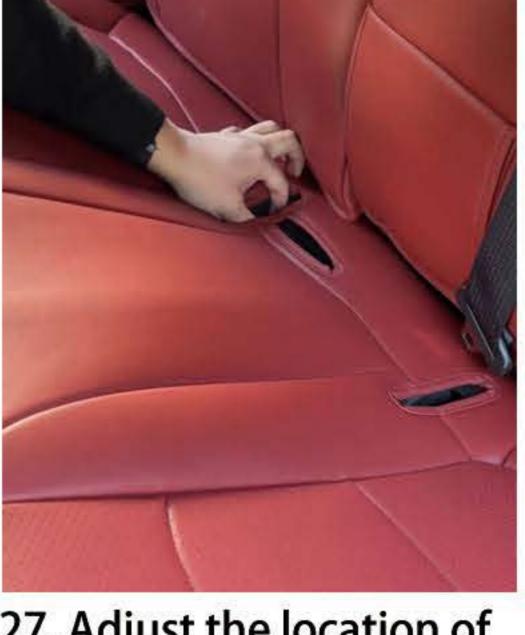

27. Adjust the location of back to its original position. suitable position. Pull out the seat belt socket.



Don't force the zipper the rear seat, insert the seat on, until you pull the two into the gap, and press it seat covers to the most

Bravo! The installation is now complete, you are awesome!