WEKAR INSTALLATION GUIDE

Here's the detailed tutorial, the time required is approximately two to three hours. If you have any questions or feedback about the car seat cover, please contact us directly.

Website: www.wekarautoshop.com Email: services@wekarautoshop.com

Model 3 2024


Installation method of front seat cover



LONG VELCRO STRIP



Scan the QR code to enter YouTube to view the installation video.

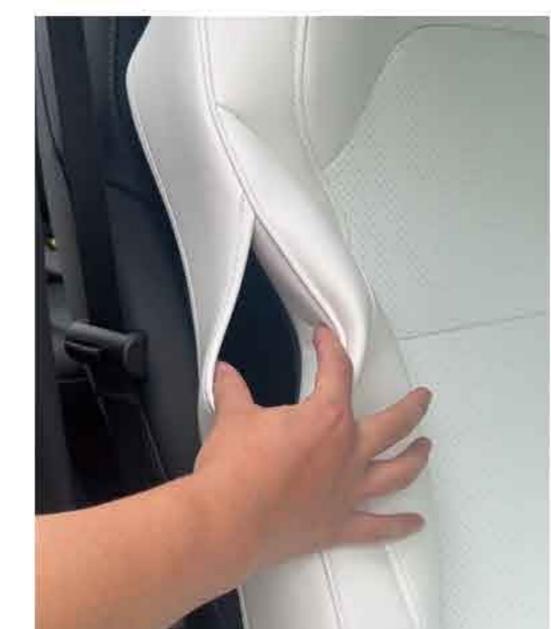

. Airbag opening can be opened.



2. Put the cover on the car seat.



3. Adjust the seat cover and make it fits smoothly and seamlessly. Wrap the



4. Press the connection part by the palm of your

hand.



5. Insert these three tapes into the gap.



6. There are two elastic hooks on the extended flaps, unhook them, and take out.




7. Pull out the three tapes 8. Connect three straps just inserted. Pass all three with the buckles. Do not tapes to the front and pull tighten it, and go to the out them.



next step first.



9. Press the position with the palm of your hand. Use your other hand to tighten the straps at the bottom.

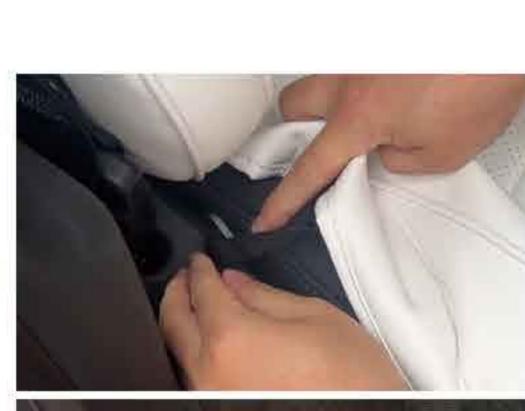

10. Insert the strip into the slit. And find the strip pull it out.(Same on the

left and right)




11. Insert the strips into the slit. Please be careful not to hurt your fingers, use the wand to help you.



12. Use the mental hook to join the two strips together (front to front, back to back).



13. Tuck the side flap of the seat cover into the gap.

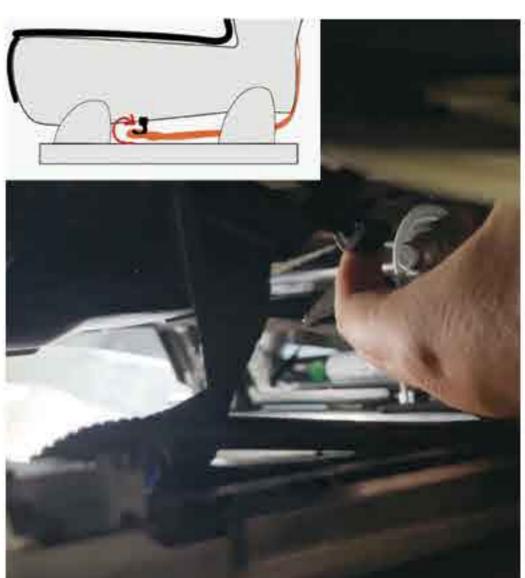

14. Attach two elastic hooks to the bottom frame of the seat.



15. Insert the edge of the seat sleeve and the side flap of the seat back cover into the gap.



16. Put on the cover for the front armrest.

Model 3 2024

Installation method of rear seat cover



1. Pull the switch on the bottom of the seat. Remove socket. (Both left and right two parts. Unzip the seat and stick it to the back. the rear seat. (Both left and right sides have one switch)



2. Disconnect the wire sides have one)



cover and cover it on the seat. Adjust the seat cover in place and zip it up.



3. Split the seat back into 4. Tear the anti-stick cloth, 5. Take the long piece of



Velcro, place the sticky side down, and the glossy through the bottom to side up.


Sticky side down



6. Pass the separate long Velcro strip from the back the front.



7. Pull the Velcro halfway out from the back to the front. Please don't pull it all the way out.

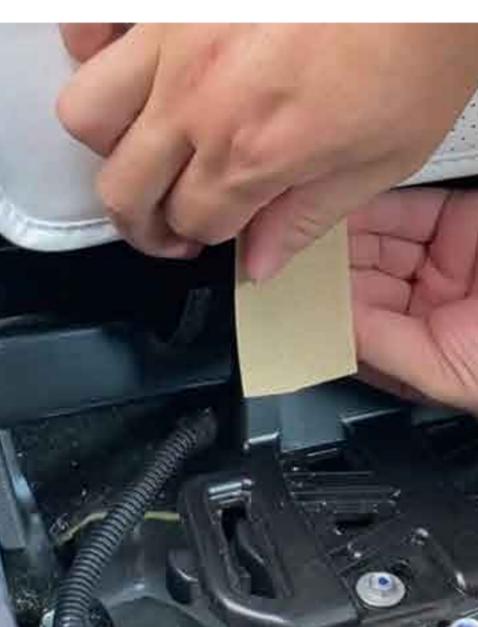

8. Then stick it togetaher with the Velcro on the seat cover.



9. Pull out the Velcro on the seat cover, tear the anti-stick cloth.



10. Take the long Velcro apart and stick the Velcro on the seat cover, tight it to the back. Repeat the steps just now to get another Velcro.



11. Unzip the seat cover and cover it on the seat. Take out the seatbelt and put the seat cover to the most suitable position. Put down the armrest.



12. Insert the side piece into gap, taking care not to hurt your fingers.



13. Affer the seat cover is installed in place, zip it up. on, until you pull the two 7 to 10. Tear the anti-stick cloth,



Don't force the zipper seat covers to the most suitable position.



14. Repeat the step from



15. Put the cover on the armrest box.

The door pad



16. Insert this part from here. Swing the armrest box up and down, and pull back. out this part.



17. Tear the anti-stick cloth, and stick it to the





18. Repeat the step from The disassembly process of the door 7 to 10. After the headrest pad can be challenging. You can cover is installed, press it choose to install it selectively or seek back to the original place. professional assistance for optimal installation.



1) Pull out the upper part of the door pad 2 Lift the door pad up 19. Removing the piece requires a bit of skill. Start by pushing it towards the inside of the car, then pull it towards the front of

the car. Finally, lift it up from the bottom

to successfully remove it.




20. Put on the door pad position is adjusted to the appropriate position.



21. Use the chucks to cover, make sure the edge wrap the straps together.



22. Then it will be installed against the snap back to the original position.

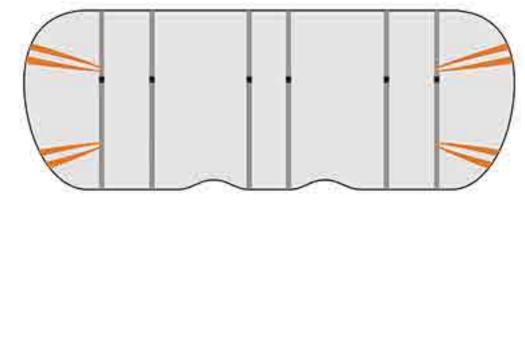

seat cushion cover,

connect the bottom

straps to each other.

24. Wrap all the edges. 23. Installation of rear


25. Connect the bottom

straps to each other, connect the side elastic belt by attach hooks or across

through the side tapes.



socket.

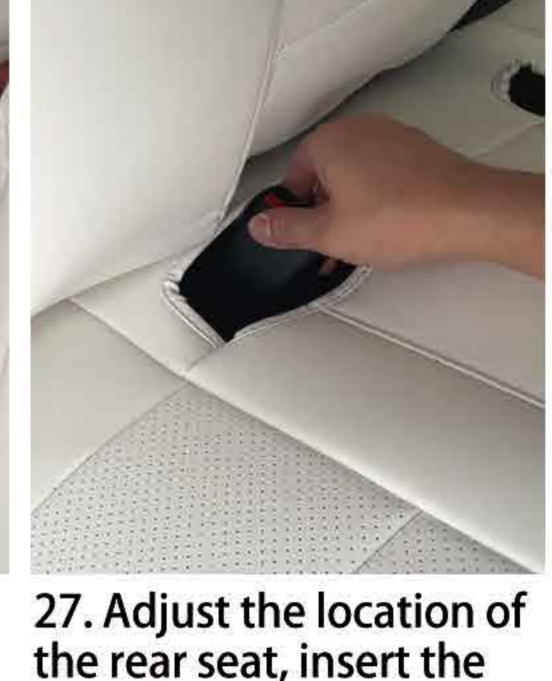

seat into the gap, and

belt socket.

press it back to its original

position. Pull out the seat

Bravo! The installation is now complete, you are awesome! We hope you enjoy the installation journey, If there is any problem with the installation, please consult our customer service at