WEKAR INSTALLATION GUIDE

Here's the detailed tutorial, the time required is approximately two to three hours. If you have any questions or feedback about the car seat cover, please contact us directly.

Website: www.wekarautoshop.com Email: services@wekarautoshop.com

Model Y

Installation method of front seat cover





Scan the QR code to enter YouTube to view the installation video.



. Airbag opening can be opened.



2. Put the cover on the car seat.




3. Adjust the seat cover and make it fits smoothly and seamlessly. Wrap the seat cover in place.




4. Press the connection part by the palm of your hand.



5. Insert these three tapes into the gap.

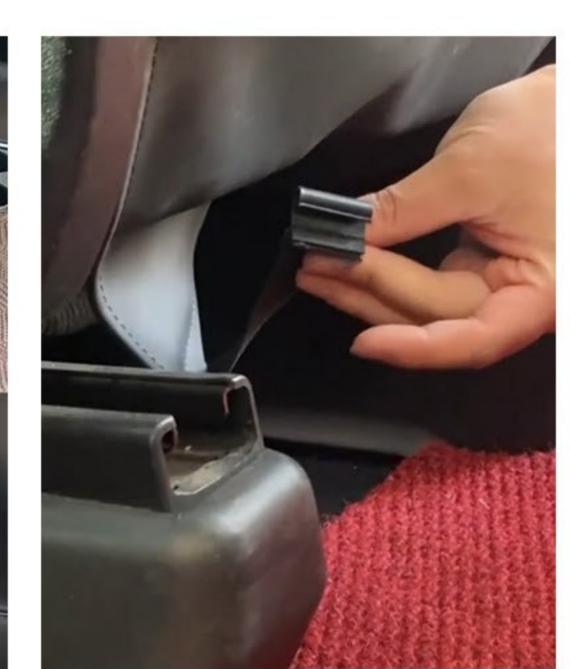

6. There are two metal hooks on the extended flaps, take these out.

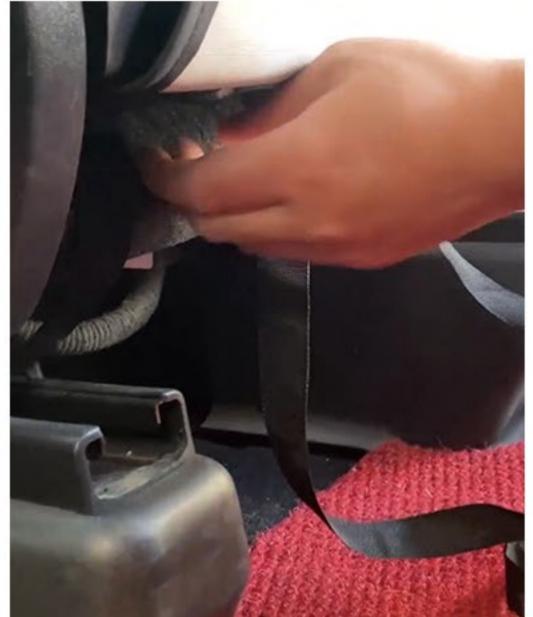

7. Pull out the three tapes just inserted.



8. Insert the strip into the slit. And find the strip pull it out.(Same on the left and right)



9. Pull out one right-side tape across the elastic belt across the elastic belt at at the bottom.



10. Pull one left-side tape the bottom.




11. Pass all three tapes to



12. Find another two the front and pull out them. elastic belts from two sides of the bottom seat and pull out from bottom.



across the second elastic belt at the bottom.

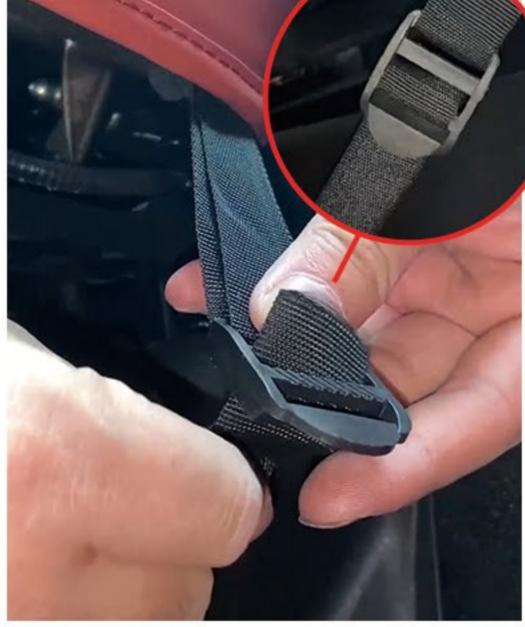


13. Pull the same side tape 14. Connect the tape with 15. Find the right side strip, 16. Connect the tape in the buckle, and adjust it to tight.



and repeat the steps from 12 to 14.



between with the buckle, and adjust it to tight.

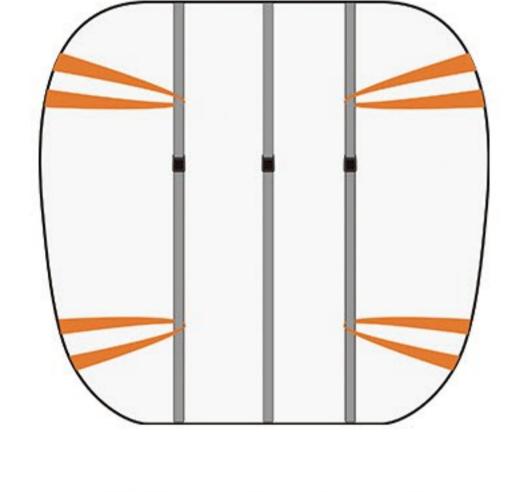


Effect display of the bottom.



17. Tuck the side flap of the seat cover into the gap.



18. Use the tool to insert the side flap of the seat back cover into the gap.

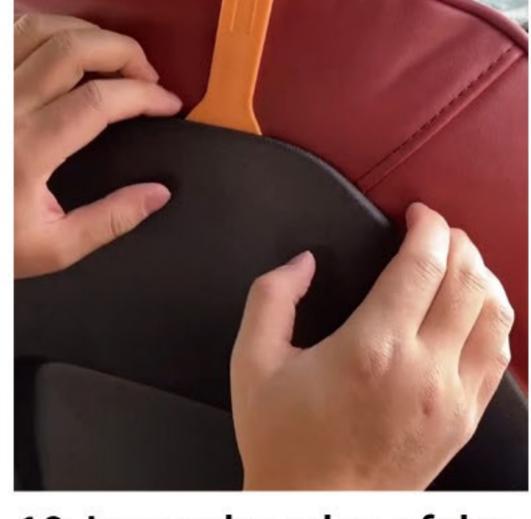

19. Insert the edge of the seat sleeve into the gap.



20. Attach two metal hooks 21. Put on the cover for to the bottom frame of the seat.



the front armrest.

The way to install the rear seat covers -

Installation method of rear seat cover



Model Y

1. Remove the rear seat, disconnect the wire

socket.



2. Insert a screwdriver into the small hole, and press the button next to it to remove the headrests.



3. Split the seat back into 4. After the seat cover is three parts. Unzip the seat installed in place, zip it up. the bottom, go through cover and cover it on the seat.





5. Pass the Velcro through the top of the metal bar.



6. Insert the edge of the seat sleeve into the gap.



7. Pull out the Velcro, tear all the anti-stick cloth in the Velcro, and stick them to the back neatly.



8. Pull the seat cover to the most suitable position upper part from the holes. now and install another and adjust the edge of the seat cover to flat.



9. Use tools to pull out



10. Repeat the steps just seat back cover.



11. Pull up the headrest in the middle.



12. Put the cover on the armrest box.



13. Insert this part from here.



14. Swing the armrest box 15. Tear the anti-stick cloth, up and down, and pull out and stick it to the back. this part.







16. As before, the Velcro goes through the gap, tear the anti-stick cloth and sticks it to the back.



cover.

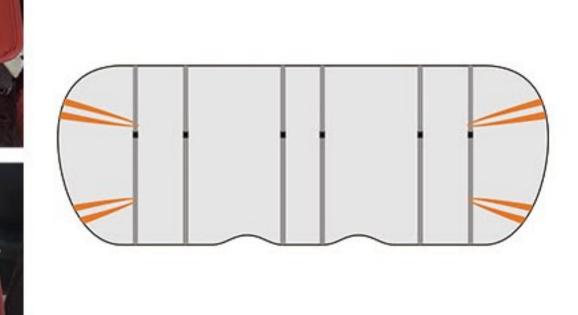

18. Installation of rear seat cushion cover, connect the bottom straps to each other.

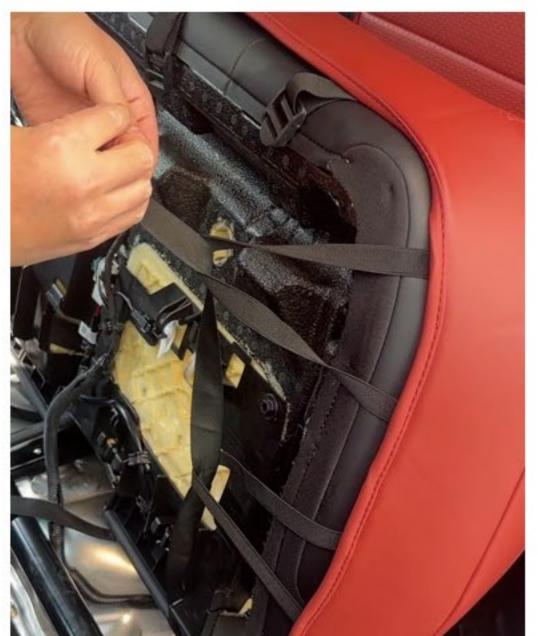


19. Connect the side elastic 20. Connect the wire belt by attach hooks or across through the side tapes.






original position.

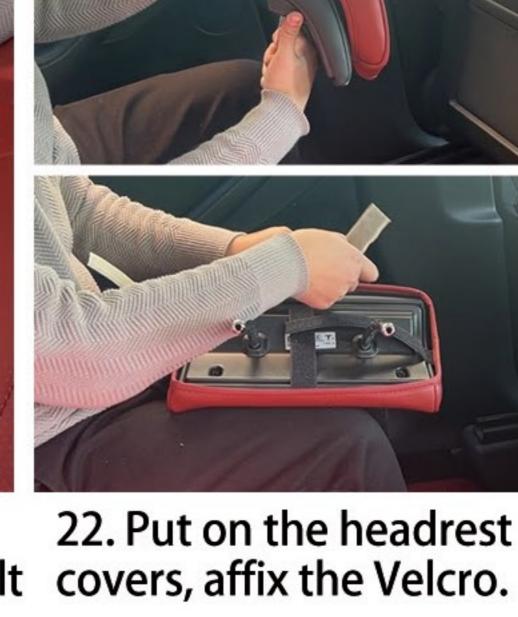

22. Put on the headrest

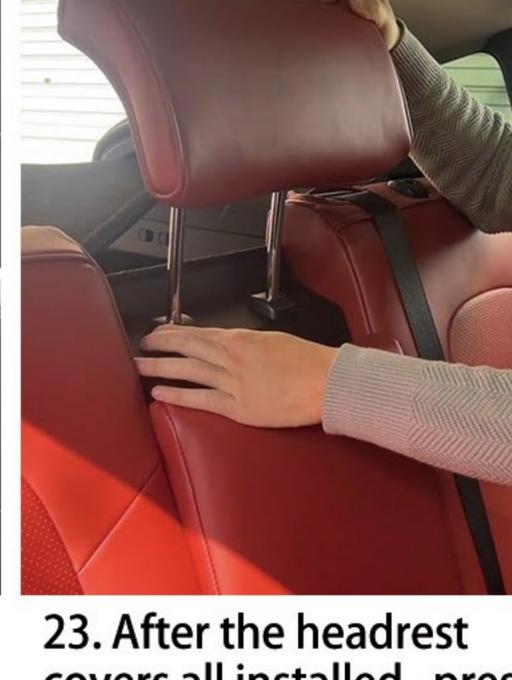

covers all installed, press on, until you pull the two them back to the original seat covers to the most place.



t force the zipper Don' suitable position.